




LEAK REPAIR - LEVEL 3 UNPRESSURIZED WITH STEAM OR CHEMICALS

Repair Kit for Pipes with Steam, Condensate and Chemical Products

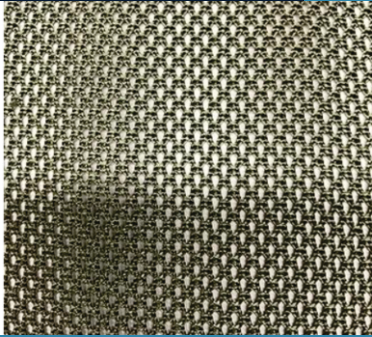

- Ready-to-use kit
- Repairs leak in 1 hour
- Withstand pressure up to 400 psi (28 kg/cm²)
- Withstand temperature up to 230°C (446°F)
- Calculated under ASME PCC2

KIT

- 1 Kit of Wrap Steel Fiberglass Tape
- 1 Balistic Reinforced MESH
- 1 Dura-Coat High Temperature Structural Putty 2000 kit
- 1 Application tool kit
- 1 Pair of latex gloves

REPAIR KIT SIZES

ITEM NUMBER	NOMINAL PIPER DIAM
PM	1/2"
0.5-1.5	3/4"
KIT	1"
	1.25"
	1.5"

ITEM NUMBER	NOMINAL PIPER DIAM
PM	2"
2-3 KIT	2.5"
	3"
PM	4"
4-5KIT	5"


ITEM NUMBER	NOMINAL PIPER DIAM
PM 6KIT	6"
PM 8KIT	8"
PM 10KIT	10"
PM 12KIT	12"
PM 14KIT	14"
PM 16KIT	16"

ITEM NUMBER	NOMINAL PIPER DIAM
PM 18KIT	18"
PM 20KIT	20"
PM 22KIT	22"
PM 24KIT	24"
PM 30KIT	30"
PM 36KIT	36"

APPLICATION PROCEDURE

1 Surface Preparation


Clean the surface mechanically (desirable St3 and roughness 60 to 80 microns).

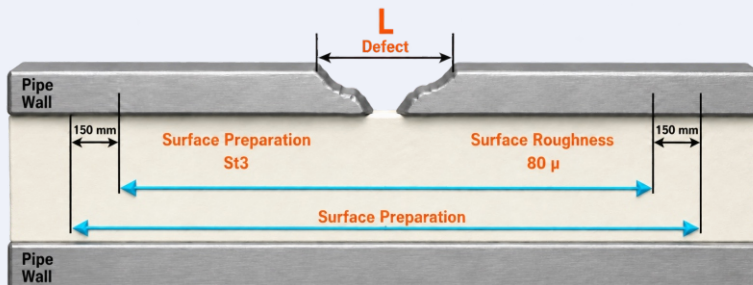

APPLICATION PROCEDURE


2 Arrest Leak

Apply the MESH with Dura-Coat High Temperature Structural Putty 2000 and on the leakage area.

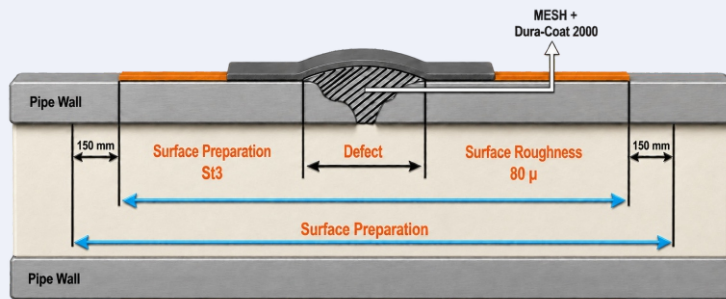


3 Apply the Putty

Mix the two components of the putty Dura-Coat High Temperature Structural Putty 2000. Apply on the repair area covering it completely.

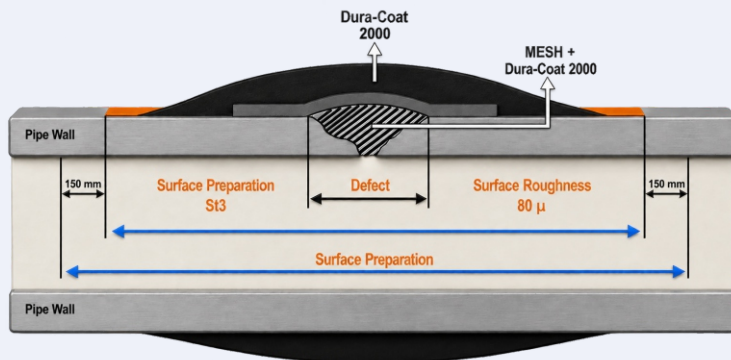

4 The Reinforcement

Apply all rolls of Fiberglass Tape coming in the kit.

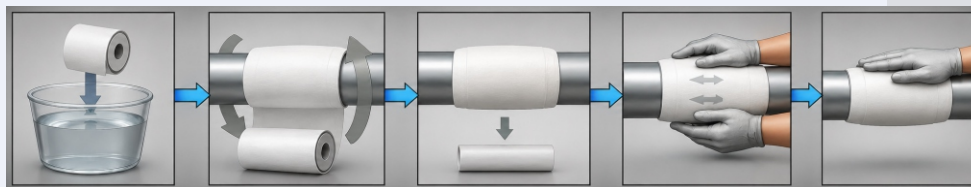


Immerse Wrap Steel Fiberglass Tape into water

Wrap the Wrap Steel Fiberglass Tape above the repair area as tightly and evenly as possible, using the entire roll

Discard the plastic tube at the end of the roll

Wet gloves in water and quickly compress the bubbling resins back into the fiberglass wrap until all bubbling has stopped

Repair completed with smooth and hard ivory appearance

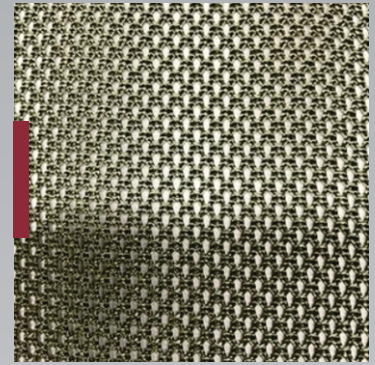

Manufacturer, Dura-Coat Industrial Inc., makes no warranty either expressed or implied including warranties of merchantability or fitness for a particular purpose for this product. Under no circumstances will the manufacturer be liable for incidental, consequential, or other damages, breach of warranty, strict liability, or any other theory arising out of use of this product. The information and/or recommendations contained herein are based on standard Product and are proprietary and furnished solely for the use of our customers. This information is provided in good faith and believed to be true and accurate as of the date/version of this document. As the manufacturer has no control over the use conditions or application process of the parties using this product, the manufacturer cannot accept responsibility for loss, injury or other damages resulting from the use of the Product or this or any other information provided by the manufacturer. Therefore, no guarantees of any kind, expressed or implied, are made by the manufacturer, Dura-Coat Industrial Inc., regarding this, or any, product manufactured by them or any contracted or licensed manufacturer. DURA-COAT® epoxy products do not provide structural integrity or improvement. They are only used to provide protection from corrosion, wear, abrasion and chemical attack on a given substrate and only to the extent provided for in the Data Sheets, Technical Data Sheets, Safety Data Sheets, and any other information as supplied in writing directly from manufacturers technical support.



+1 (561) 757-5620



dura-coat@dura-coat.net



www.dura-coat.net



12481 NW 44th Street
Coral Springs, Florida, 33065, USA